




PRODUCT DIMENSIONS & SPECIFICATIONS

DX-TREME CA SERIES
UNCASED UPFLOW / DOWNFLOW COILS

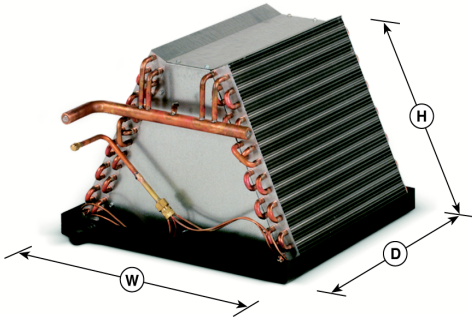

Representative drawing only. Some models may vary in appearance.

STANDARD SPECIFICATIONS

- Rifled copper tubing, enhanced aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Left- or right-hand refrigerant and plumbing connections.
- Liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Externally mounted flowrater body with Schrader valve for hiss-testing.
- Heavy duty polypropylene drain pans on most models.
- Upflow without field modification. Downflow applications require plate kit, included.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with both R-22 and R-410a when proper metering device is used.
- Ten-year limited warranty.

AVAILABLE OPTIONS:

- Factory or field-installable TXV.
- Powder painted stainless steel drain pan.
- Schrader mounted on suction manifold, external to cabinet.

COIL MODEL	FLOW RATER SIZE		DIMENSIONS						SHIPPING INFORMATION			
			PAN WIDTHS (W)				PAN DEPTH (D)	BARE SLAB HEIGHT (H)	SHIPPING WEIGHT			SKID QTY
			13	16	19-1/2	23			2 ROW	3 ROW	4 ROW	
R22	R410a											
CA24A*	0.059	0.055	13	16	19-1/2		19-3/8	12	17	27	35	30
CA24B*	0.059	0.055	13	16	19-1/2		19-3/8	14	20	31	41	25
CA24C*	0.059	0.055	13	16	19-1/2		19-3/8	16	23	36	47	25
CA24D*	0.059	0.055	13	16	19-1/2		19-3/8	18	25	40	53	20
CA30A*	0.068	0.059	13	16	19-1/2		19-3/8	14	20	31	41	25
CA30B*	0.068	0.059	13	16	19-1/2		19-3/8	16	23	36	47	25
CA30C*	0.068	0.059	13	16	19-1/2		19-3/8	18	25	40	53	20
CA30D*	0.068	0.059	13	16	19-1/2		19-3/8	20	28	45	58	16
CA30E*	0.068	0.059	13	16	19-1/2		19-3/8	20	30	47	60	16
CA36A*	0.074	0.068	13 for 2, 3R; 16 for 4R	16	19-1/2		19-3/8	16	23	36	47	25
CA36B*	0.074	0.068	13 for 2, 3R; 16 for 4R	16	19-1/2		19-3/8	18	25	40	53	20
CA36C*	0.074	0.068	13 for 2, 3R; 16 for 4R	16	19-1/2		19-3/8	20	28	45	58	16
CA36D*	0.074	0.068	13 for 2, 3R; 16 for 4R	16	19-1/2		19-3/8	22	31	49	64	12
CA42A*	0.080	0.074		16	19-1/2	23	19-3/8	18	25	40	53	20
CA42B*	0.080	0.074		16	19-1/2	23	19-3/8	20	28	45	58	16
CA42C*	0.080	0.074		16	19-1/2	23	19-3/8	22	31	49	64	12
CA42D*	0.080	0.074		16	19-1/2	23	19-3/8	24	34	54	70	12
CA48A*	0.084	0.080		16	19-1/2	23	19-3/8	20	28	45	58	16
CA48B*	0.084	0.080		16	19-1/2	23	19-3/8	22	31	49	64	12
CA48C*	0.084	0.080		16	19-1/2	23	19-3/8	24	34	54	70	12
CA48D*	0.084	0.080		16	19-1/2	23	19-3/8	26	37	58	76	12
CA48F*	0.084	0.080		16	19-1/2	23	19-3/8	24	36	56	72	12
CA48G*	0.084	0.080		16	19-1/2	23	19-3/8	26	39	60	78	12
CA60A*	0.092	0.089			19-1/2	23	19-3/8	24	34	54	70	12
CA60B*	0.092	0.089			19-1/2	23	19-3/8	26	37	58	76	12
CA60C*	0.092	0.089			19-1/2 [2]	23 [2]	21-3/4	24	38	60	79	12
CA60D*	0.092	0.089			19-1/2 [2]	23 [2]	21-3/4	26	41	65	86	12
CA60E*	0.092	0.089				24 [3]	21	26	46	73	95	12
CA60F*	0.092	0.089			19-1/2	23	19-3/8	24	41	62	80	12
CA60G*	0.092	0.089				24 [3]	21	26	48	75	97	12

Notes: 1) Do not use heavy duty polypropylene drain pans on oil furnaces or other applications where outlet temperatures may exceed 300°F. Specify metal drain pans for these applications. 2) Metal drain pan. 3) Metal drain pan. Slab rotated 90°. Refrigerant and plumbing connections still exit in front.

800-423-9007
ASPENMFG.COM

R-410a
READY



ASSEMBLED
IN THE USA

EVERYTHING'S
RIGHT HERE™